

Marvell 88E2580 Octal-Port 2.5/5GbE copper PHY

Octal 10/100/1000/2.5G/5GBASE-T Ethernet Transceiver with IEEE 1588v2 PTP Support

Overview


The Marvell® Alaska® 88E2580 is a fully IEEE 802.3bz/NBASE-T-compliant 8-port physical layer (PHY) device that supports IEEE 802.3az Energy Efficient Ethernet (EEE). The device supports a wide variety of host-side interfaces including MP-USXGMII (Multi-port USXGMII), USXGMII, XFI, 5GBASE-R, 2.5GBASE-X, and SGMII to support full backward compatibility with lower speed legacy Ethernet rates including 1 Gbps, 100 Mbps, and 10 Mbps. MP-USXGMII decreases the number of I/O pins on the MAC interface and lowers the overall power consumption. The 88X3580 supports two MP-USXGMII interfaces (20G-QXGMII) for eight ports of 5G/2.5GBASE-T.

This device family enables extremely low power across all structured wiring cable lengths, enabling dense 2.5/5G Gbps

applications. The 88E2580 supports Category 5e-type cables for data rates up to 5 Gbps and distances greater than 100m.

The 88E2580 also incorporates the Marvell advanced Virtual Cable Tester® (VCT®) technology for cable fault detection and proactive cable performance monitoring. With advanced digital signal processing (DSP), the transceiver can proactively monitor the performance of a cable and determine cable length and type. It can detect opens and shorts, then report the location of a fault. The 88X3580 has integrated 2-step PTP functionality in compliance with IEEE 1588v2 and Synchronous Ethernet (SyncE) support.

Block Diagram

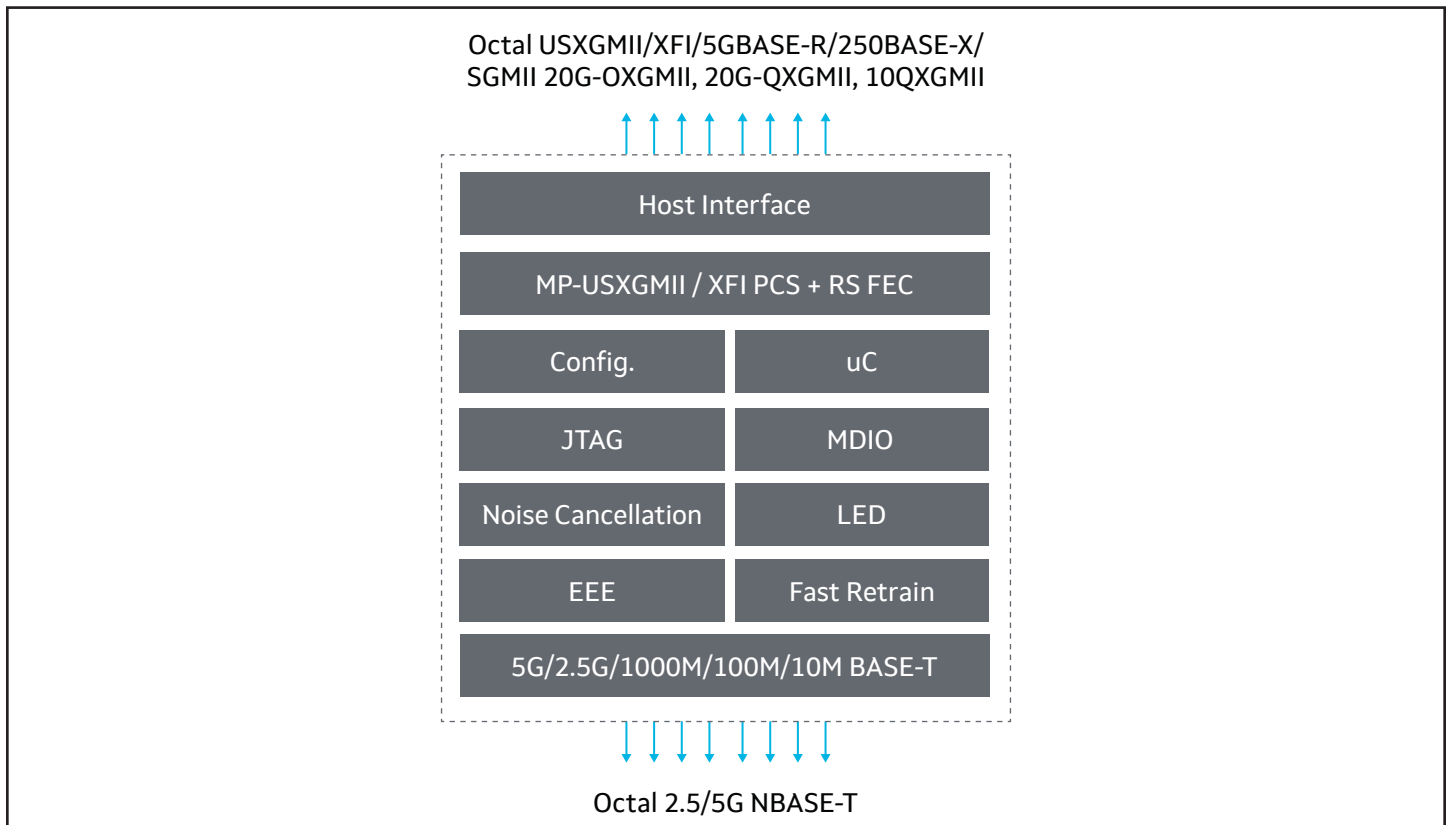

Key Features

Features	Benefits
Speed	• 8-port, 5-speed PHY, operating at 10, 100 Mbps, 1, 2.5G, or 5Gbps data rates on UTP copper lines • Compliant with IEEE 802.3bz/NBASE-T specifications for 5 GbE and 2.5 GbE modes
Host interface	• MP-USXGMII (20G), USXGMII, XFI, 5GBASE-R, 2.5GBASE-X, and SGMII system-side interfaces on all devices
Rate matching	• XFI with Rate matching and in-band flow control support for 5G/2.5GBASE-T data rates
Time stamping	• IEEE 1588v2 timestamping (2-step) and SyncE support
Energy efficient	• IEEE 802.3az Energy Efficient Ethernet for all supported data rates
Performance	• >100m reach on CAT 5e for 5G and 2.5G modes. • >500m reach on CAT 5e in 100M for surveillance camera applications • Meets 10GKR electrical specifications on FR4 with an insertion loss up to 25 dB • Meets 25GKR electrical specifications on FR4 with an insertion loss up to 30 dB
Management	• I2C-compatible management interface • MDC/MDIO management interface
Package	• 17 mm × 17 mm FC-TFBGA package

Target Applications

- Enterprise/Campus Access mGig
- High density 2.5/5G switches (aggregation)
- SMB 2.5/5G connectivity



To deliver the data infrastructure technology that connects the world, we're building solutions on the most powerful foundation: our partnerships with our customers. Trusted by the world's leading technology companies for 25 years, we move, store, process and secure the world's data with semiconductor solutions designed for our customers' current needs and future ambitions. Through a process of deep collaboration and transparency, we're ultimately changing the way tomorrow's enterprise, cloud, automotive, and carrier architectures transform—for the better.

Copyright © 2020 Marvell. All rights reserved. Marvell and the Marvell logo are trademarks of Marvell or its affiliates. Please visit www.marvell.com for a complete list of Marvell trademarks. Other names and brands may be claimed as the property of others.